


*The holding power of screws—the productivity of a nail gun.*



**Trim-head self-drilling,  
2/3 coarse-thread screw**  
#1 square drive  
Type 17 point  
W72 Magni 599 coating, waxed  
*THCH8212 #8 x 2-1/2"*

*For composite decking. Trim head minimizes “volcano” swelling around hole. 2/3 thread ensures tight connection: screw spins if thread doesn’t have solid bite in joist. Type 17 point eliminates predrilling. Includes one #1 square bit per box.*

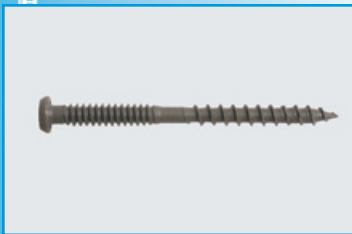

**Composite Deck Screw**  
#2 square drive  
Dual thread design  
Tan, Grey or Red Magni 599 coated and  
Stainless Steel available, waxed  
*CD10212G #10 x 2-1/2"*  
*CD10212T #10 x 2-1/2"*  
*CD10212R #10 x 2-1/2"*  
*CD10212S #10 x 2-1/2"*

*For composite decking. Special design eliminates mushrooming and ensures a clean, flush finish.*

*CD10300G #10 x 3"*  
*CD10300T #10 x 3"*  
*CD10300R #10 x 3"*  
*CD10300S #10 x 3"*

*Additional screws available upon request*



**The PAM auto-feed screw system offers high productivity for every application:**

- High quality, contractor tough
- 50 screws per strip
- Reversible belt—faster reloads
- Positive advance with any screw size, 5/8" to 3"
- Positive-placement, open-nose design aids screw placement
- Saves time
- Improves quality
- Reduces callbacks
- Reduces operator fatigue
- Protects your reputation

**Pamfast screws fit:** Hilti, Makita, Grabber, Senco, and Milwaukee tools.

**W72 Magni 599** is an acid-resistant, pore-sealing agent chosen to resist corrosive elements.

- Resistant up to 1,500 hours of Salt Spray Test ASTM B-117
- Resistant up to 20 cycles of Acid Rain Test DIN 50018, SFW 2.0L

**PAMFAST composite decking screws** are designed for use with products such as:

- Trex®
- ChoiceDeck®
- Weatherbest®
- Nexwood®
- Epoch®