


Technical Data Sheet

www.pamfast.com

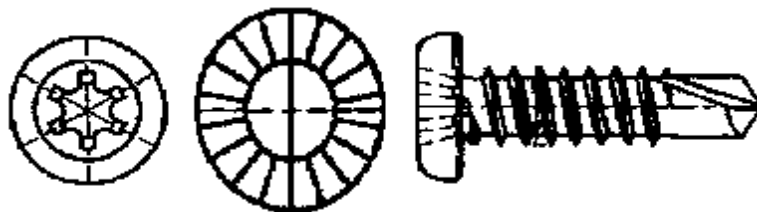

**Flat Head, Serrated Underside, PAMDrive Recess
Self Drilling Screw
Hardened, Clear Zinc
SD101834, #10 x 3/4"
PAM Fastening Technology, Inc.**

Head Diameter	8.80-9.30 mm
Major Diameter	4.62-4.80 mm
Min. Diameter	3.85-4.05 mm
Length	19.05 +/- .08 mm
Access Depth	1.76-2.19 mm
Wire Diameter	3.80 mm
Breaking Torque	Min 70 kg/cm
Penetration	Three threads past
Withdrawal	550 lbs (16 ga)
Material	AISI C1022
Salt Spray Test (ASTM B-117)	24 hours
Bent Testing	15°

All fasteners manufactured for PAM Fastening Technology, Inc. are of a non-chemical hazardous nature.

Important Notice: The details in our sheets and other PAM publications are provided to the best of our knowledge. The contents, however, are not legally binding. In all cases we recommend that preliminary tests be carried out by the customer. In all respects our general terms of sale shall apply.

PAM[®]

PAM Fastening Technology, Inc.

2120 Gateway Blvd. • Charlotte, NC 28208

704/394-3141 • Fax 704/394-9339 • email: sales@pamfast.com