


Technical Data Sheet

www.pamfast.com

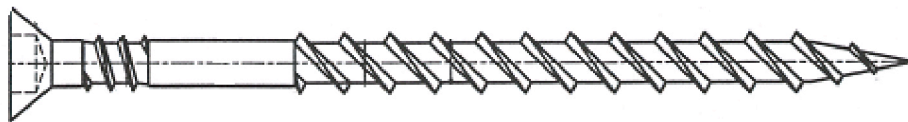

**Flat Head, PAMDrive Recess, 2/3 Coarse Thread, Yellow Zinc,
Passivation with wax
WCYZ8112 #8 x 1 1/2" WC, YZ
PAM Fastening Technology, Inc.**

All fasteners manufactured for PAM Fastening Technology, Inc. are of a non-chemical hazardous nature.

Head Diameter	8.00 – 8.50mm
Major Diameter	4.10 – 4.35mm
Minor Diameter	2.70-2.95mm
Length	38.10+-1.0mm
Access Depth	1.65 – 2.08mm
Wire Diameter	3.15mm
Surface Hardness	450-700 HV
Core Hardness	450 – 240 HV
Breaking Torque	min. 42 (KG/CM)
Penetration	3/4"
Withdrawal	625 LBS.
Material	AISI 1022
Salt Spray Test (ASTM B-117)	24 Hours
Bent Testing	15°

Important Notice: The details in our sheets and other PAM publications are provided to the best of our knowledge. The contents, however, are not legally binding. In all cases we recommend that preliminary tests be carried out by the customer. In all respects our general terms of sale shall apply.

PAM[®]

PAM Fastening Technology, Inc.

2120 Gateway Blvd. • Charlotte, NC 28208

704/394-3141 • Fax 704/394-9339 • email: sales@pamfast.com