


Technical Data Sheet

www.pamfast.com

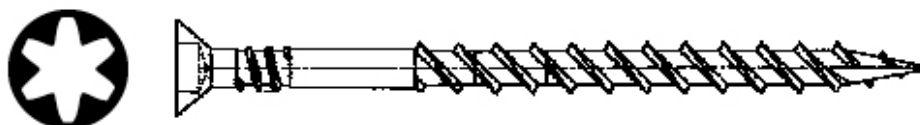

**Small Flat Head, PAMDrive recess, 2/3 Coarse Thread
(8 TPI) Type 17 Point, SS302
WDSS8134 #8 x 1-3/4" Stainless Steel
PAM Fastening Technology, Inc.**

Head Diameter	7.00 – 7.50 mm
Major Diameter	4.30 – 4.60 mm
Min. Diameter	3.75 – 4.10 mm
Length	44.5 ± 1. mm
Access Depth	1.65 – 2.08 mm
Wire Diameter	3.30 mm
Surface Hardness	550-750 HV
Core Hardness	450-240HV
Breaking Torque	Not Applicable
Penetration	1"
Withdrawal	680 lbs
Material	SS302
Salt Spray Test (ASTM B-117)	Not Applicable
Bent Testing	Not Applicable

All fasteners manufactured for PAM Fastening Technology, Inc. are of a non-chemical hazardous nature.

Important Notice: The details in our sheets and other PAM publications are provided to the best of our knowledge. The contents, however, are not legally binding. In all cases we recommend that preliminary tests be carried out by the customer. In all respects our general terms of sale shall apply.

PAM[®]

PAM Fastening Technology, Inc.

2120 Gateway Blvd. • Charlotte, NC 28208

704/394-3141 • Fax 704/394-9339 • email: sales@pamfast.com